


PART NUMBER SHOWN: QJ373D-L-1-CM

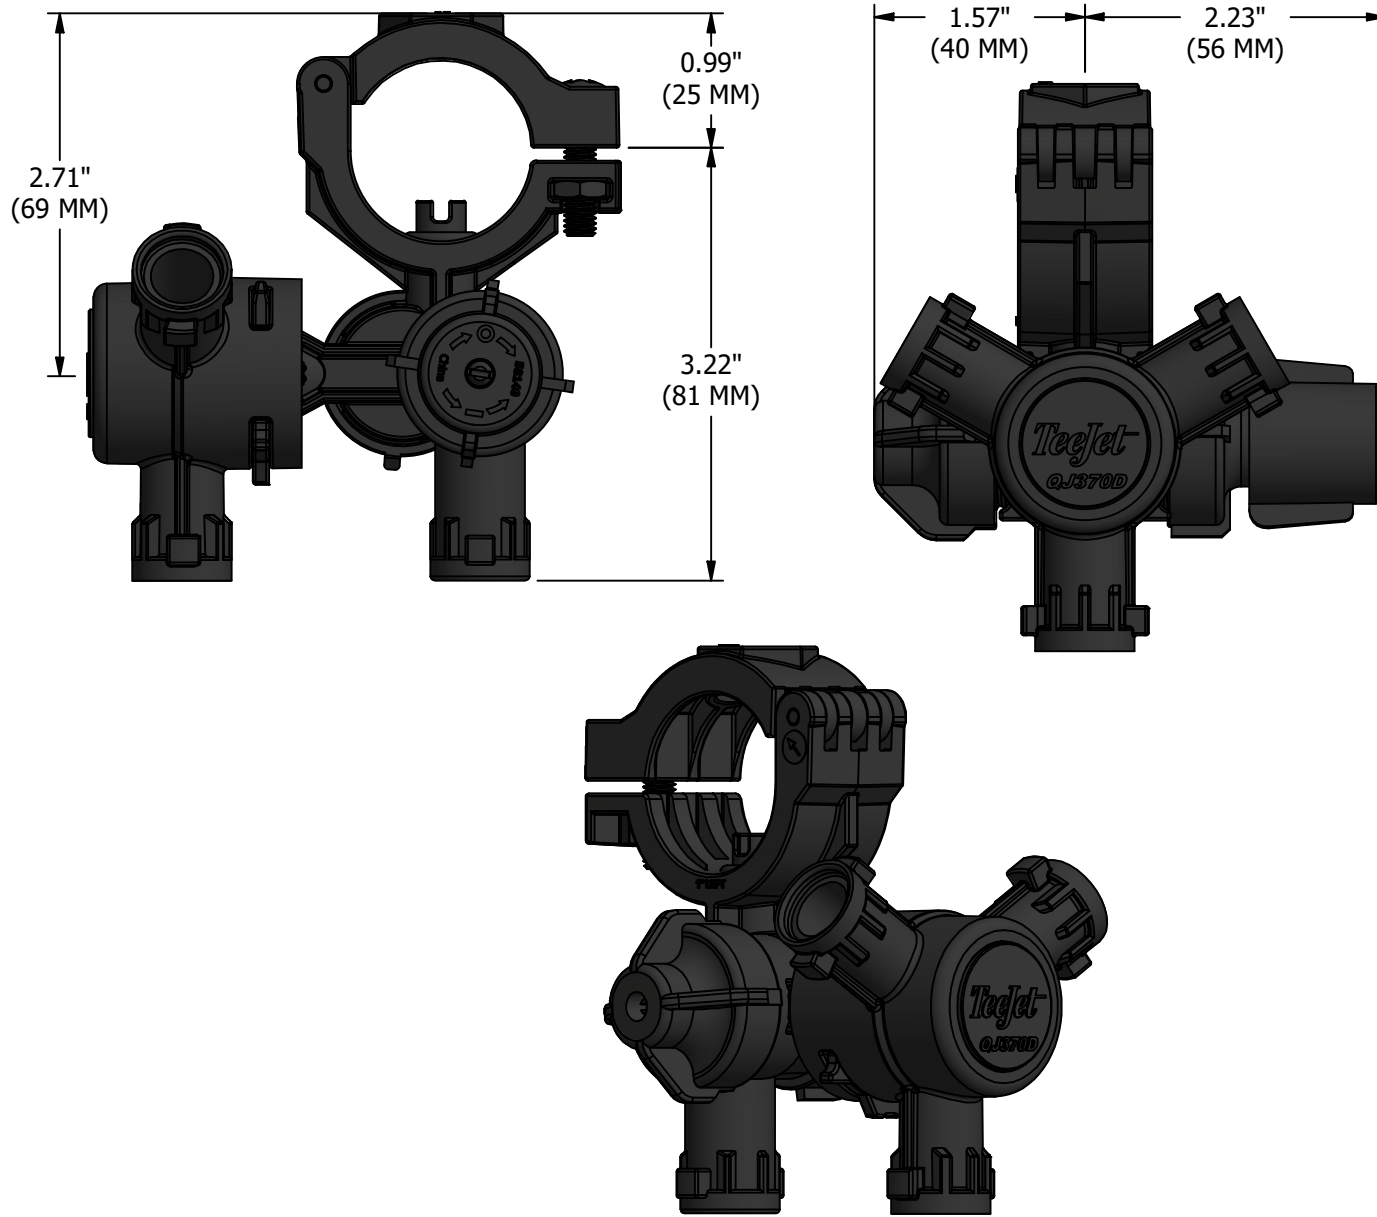

FEATURES

- COMPACT NOZZLE BODY WITH CHOICE OF 3 OR 5 OUTLET TURRETS
- INCLUDES SINGLE HIGH FLOW FERTILIZER OUTLET
- DUAL CHECK VALVE DESIGN USED TO CONTROL TURRET AND FERTILIZER OUTLETS INDIVIDUALLY
- MAXIMUM OPERATING PRESSURE: 300 PSI (20 BAR)
- POSITIVE INDEXING AND SHUT-OFF BETWEEN EACH SPRAY POSITION
- AVAILABLE FOR 1/2", 3/4", AND 1" PIPE, 20MM AND 25MM TUBING
- HINGED UPPER CLAMP AND STAINLESS STEEL BOLT WITH CAPTURED NUT REDUCES INSTALLATION TIME
- 8MM HEX SOCKET ON UPPER CLAMP
- MOUNTS TO 3/8" (9.5MM) HOLE IN TUBING OR PIPE
- 21/32" MOUNTING HOLE OPTION AVAILABLE WITH 1" CLAMP ONLY
- STANDARD O-RINGS MADE OF FKM
- AUTOMATIC SPRAY TIP ALIGNMENT WITH USE OF QUICK TEEJET® CAPS
- CUSTOMIZABLE CHECK VALVE SHUTOFF OPTIONS AVAILABLE
- FOR "HOW TO ORDER" INSTRUCTIONS PLEASE SEE DATA SHEET DS118694

SAMPLE PART NUMBERS

- QJ373D-L-1-CM: THREE OUTLET QUICK TEEJET® RIGHT NOZZLE BODY FOR 1" PIPE, 3/8" (9.5MM) MOUNTING HOLE WITH LEFTMOUNTED STANDARD CHEMSAVER® CHECK VALVE AND RIGHT MOUNTED MANUAL CHEMSAVER
- QJ375D-R-1-XM: 5 OUTLET QUICK TEEJET® RIGHT NOZZLE BODY FOR 1" PIPE, 3/8" (9.5MM) MOUNTING HOLE WITH NO CHEMSAVER® ON RIGHT SIDE AND LEFT MOUNTED MANUAL CHEMSAVER®

INSTALLATION NOTE:

- PLACE SCREW IN NUT AND BEGIN TURNING BY HAND (1-2 TURNS) TO ENSURE PROPER ENGAGEMENT BEFORE USING A LOW SPEED TORQUE GUN.
- TORQUE TO 20-23 IN-LBS.

QJ373D FLOW RATE		
	FLOW RATE AT 5 PSI PRESSURE DROP	FLOW RATE AT 10 PSI PRESSURE DROP
BOTH OUTLETS	4.1 GPM	5.3 GPM
BOTTOM OUTLET ONLY	3.0 GPM	3.9 GPM
TURRET OUTLET ONLY	2.7 GPM	3.6 GPM

QJ375D FLOW RATE		
	FLOW RATE AT 5 PSI PRESSURE DROP	FLOW RATE AT 10 PSI PRESSURE DROP
BOTH OUTLETS	4.0 GPM	5.2 GPM
BOTTOM OUTLET ONLY	3.0 GPM	3.9 GPM
TURRET OUTLET ONLY	2.5 GPM	3.4 GPM

DESCRIPTION: QJ370D WET BOOM DUAL NOZZLE CONTROL TURRET BODY ASSEMBLY		
	REVISION NO. 2	Data Sheet No. DSQJ370D
	REFERENCE: 10/14/24	SHEET: 1 OF 1 DWG SIZE: B